

MODEL 408


Free Area in Square Feet And Square Meters

Performance Chart

Free Area AMCA Licensed for openings up to 72" X 120".
For free area data for larger openings, contact factory.


FREE AREA IN SQUARE FEET AND SQUARE METERS

| | | | | | | |
|-------------|--------------|---------------|---------------|---------------|---------------|---------------|
| 3048. mm | 0.461 | 0.984 | 1.507 | 2.030 | 2.553 | 3.076 |
| 120" | 4.960 | 10.590 | 16.220 | 21.850 | 27.480 | 33.11 |
| 2743.2 mm | 0.414 | 0.883 | 1.352 | 1.821 | 2.290 | 2.760 |
| 108" | 4.450 | 9.501 | 14.552 | 19.603 | 24.654 | 29.706 |
| 2438.4 mm | 0.366 | 0.782 | 1.197 | 1.612 | 2.028 | 2.443 |
| 96" | 3.940 | 8.412 | 12.884 | 17.357 | 21.829 | 26.301 |
| 2133.6 mm | 0.319 | 0.680 | 1.042 | 1.404 | 1.765 | 2.127 |
| 84" | 3.430 | 7.323 | 11.217 | 15.110 | 19.003 | 22.897 |
| 1828.8 mm | 0.271 | 0.579 | 0.887 | 1.195 | 1.503 | 1.811 |
| 72" | 2.920 | 6.234 | 9.549 | 12.863 | 16.178 | 19.492 |
| 1524. mm | 0.224 | 0.478 | 0.732 | 0.986 | 1.240 | 1.494 |
| 60" | 2.410 | 5.146 | 7.881 | 10.617 | 13.352 | 16.088 |
| 1219.2 mm | 0.176 | 0.377 | 0.577 | 0.777 | 0.978 | 1.178 |
| 48" | 1.900 | 4.057 | 6.213 | 8.370 | 10.527 | 12.683 |
| 914.4 mm | 0.129 | 0.275 | 0.422 | 0.569 | 0.715 | 0.862 |
| 36" | 1.390 | 2.968 | 4.546 | 6.123 | 7.701 | 9.279 |
| 609.6 mm | 0.081 | 0.174 | 0.267 | 0.360 | 0.453 | 0.545 |
| 24" | 0.880 | 1.879 | 2.878 | 3.877 | 4.876 | 5.874 |
| 304.8 mm | 0.034 | 0.073 | 0.112 | 0.151 | 0.190 | 0.229 |
| 12" | 0.370 | 0.790 | 1.210 | 1.630 | 2.050 | 2.47 |
| H/W | 304.8 mm | 609.6 mm | 914.4 mm | 1219.2 mm | 1524. mm | 1828.8 mm |
| | 12" | 24" | 36" | 48" | 60" | 72" |

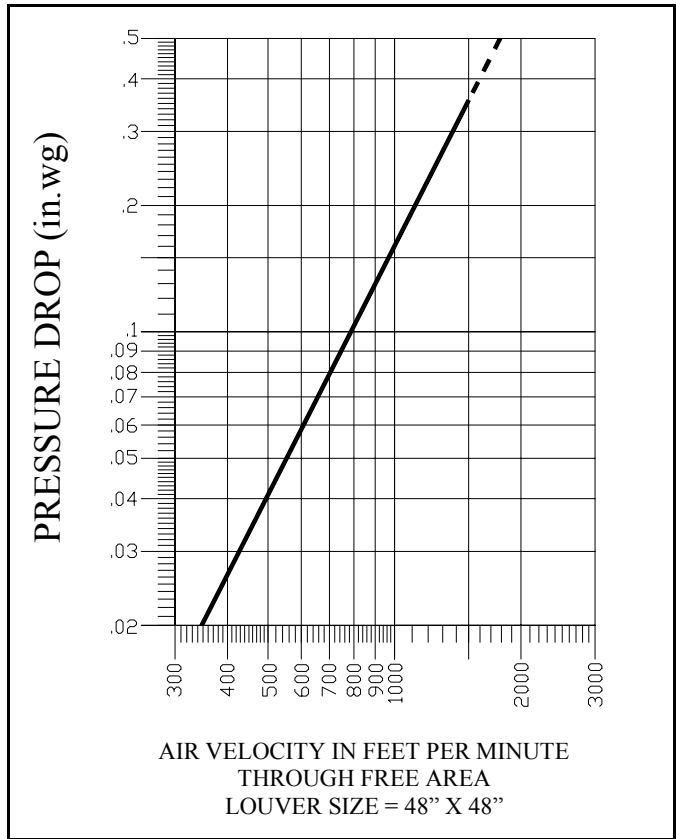

The AMCA Certified Ratings Seal applies to Air Capacities in the intake mode only.

Water Penetration Chart

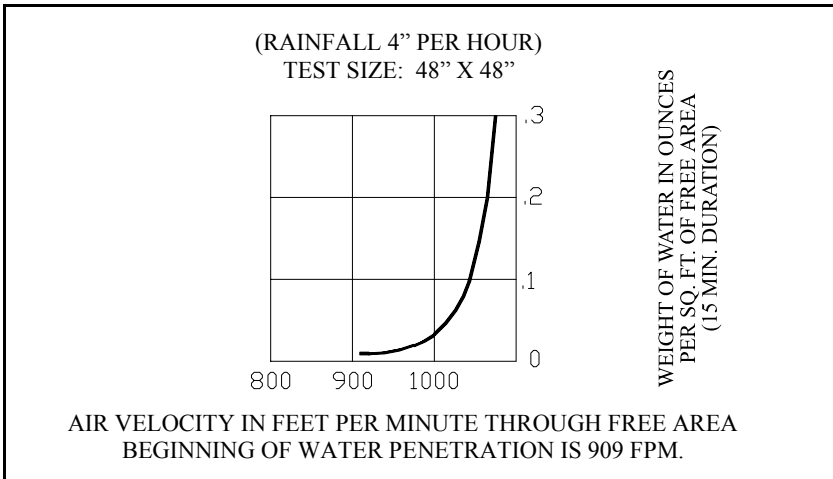

Ratings do not include the effect of a bird screen.

NOTE: All tests are for standard .075 lb./cu. ft.



Industrial Louvers, Inc. certifies that Model 408 shown hereon is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings and water penetration ratings.



CATALOG NO. 408

Rev: JANUARY 2004