

# MODEL 652DD


## Free Area in Square Feet And Square Meters

## Performance Chart

Free Area AMCA Licensed for openings up to 72" X 120".  
For free area data for larger openings, contact factory.


### FREE AREA IN SQUARE FEET AND SQUARE METERS

3048. mm	0.465	1.022	1.579	2.137	2.694	3.251
<b>120"</b>	<b>5.000</b>	<b>10.998</b>	<b>16.996</b>	<b>22.994</b>	<b>28.992</b>	<b>34.99</b>
2743.2 mm	0.416	0.913	1.411	1.909	2.407	2.905
<b>108"</b>	<b>4.468</b>	<b>9.828</b>	<b>15.187</b>	<b>20.547</b>	<b>25.907</b>	<b>31.267</b>
2438.4 mm	0.366	0.805	1.243	1.682	2.120	2.559
<b>96"</b>	<b>3.936</b>	<b>8.657</b>	<b>13.379</b>	<b>18.100</b>	<b>22.822</b>	<b>27.543</b>
2133.6 mm	0.317	0.696	1.075	1.454	1.834	2.213
<b>84"</b>	<b>3.403</b>	<b>7.487</b>	<b>11.570</b>	<b>15.653</b>	<b>19.737</b>	<b>23.820</b>
1828.8 mm	0.267	0.587	0.907	1.227	1.547	1.867
<b>72"</b>	<b>2.871</b>	<b>6.316</b>	<b>9.761</b>	<b>13.206</b>	<b>16.652</b>	<b>20.097</b>
1524. mm	0.218	0.478	0.739	1.000	1.260	1.521
<b>60"</b>	<b>2.339</b>	<b>5.146</b>	<b>7.953</b>	<b>10.760</b>	<b>13.566</b>	<b>16.373</b>
1219.2 mm	0.168	0.370	0.571	0.772	0.974	1.175
<b>48"</b>	<b>1.807</b>	<b>3.975</b>	<b>6.144</b>	<b>8.313</b>	<b>10.481</b>	<b>12.650</b>
914.4 mm	0.119	0.261	0.403	0.545	0.687	0.829
<b>36"</b>	<b>1.274</b>	<b>2.805</b>	<b>4.335</b>	<b>5.866</b>	<b>7.396</b>	<b>8.927</b>
609.6 mm	0.069	0.152	0.235	0.318	0.400	0.483
<b>24"</b>	<b>0.742</b>	<b>1.634</b>	<b>2.527</b>	<b>3.419</b>	<b>4.311</b>	<b>5.203</b>
304.8 mm	0.020	0.043	0.067	0.090	0.114	0.137
<b>12"</b>	<b>0.210</b>	<b>0.464</b>	<b>0.718</b>	<b>0.972</b>	<b>1.226</b>	<b>1.480</b>
<b>H/W</b>	304.8 mm	609.6 mm	914.4 mm	1219.2 mm	1524. mm	1828.8 mm
	<b>12"</b>	<b>24"</b>	<b>36"</b>	<b>48"</b>	<b>60"</b>	<b>72"</b>

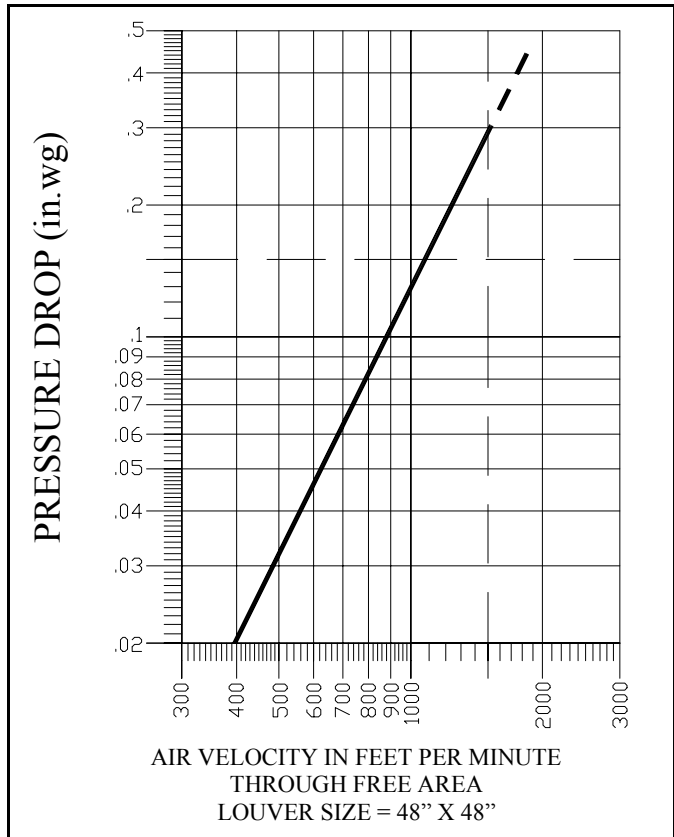

The AMCA Certified Ratings Seal applies to Air Capacities in the intake mode only.

## Water Penetration Chart

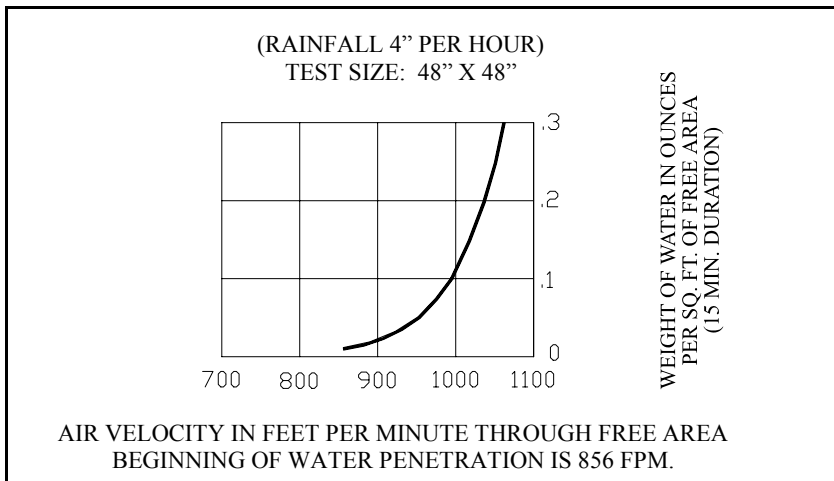

Industrial Louvers, Inc. certifies that Model 652DD shown hereon is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings and water penetration ratings.

Ratings do not include the effect of a bird screen.

NOTE: All tests are for standard .075 lb./cu. ft.

CATALOG NO. 652DD

Rev: JANUARY 2004

