

MODEL 655XP


Free Area in Square Feet And Square Meters

Free Area AMCA Licensed for openings up to 72" X 120".
For free area data for larger openings, contact factory.

FREE AREA IN SQUARE FEET AND SQUARE METERS


3048. mm	0.454	0.998	1.543	2.087	2.632	3.176
120"	4.884	10.745	16.606	22.466	28.327	34.188
2743.2 mm	0.395	0.870	1.344	1.819	2.293	2.767
108"	4.256	9.362	14.469	19.575	24.682	29.788
2438.4 mm	0.352	0.775	1.197	1.620	2.043	2.465
96"	3.791	8.340	12.889	17.438	21.987	26.536
2133.6 mm	0.309	0.679	1.050	1.421	1.791	2.162
84"	3.325	7.314	11.303	15.293	19.282	23.271
1828.8 mm	0.264	0.582	0.899	1.217	1.534	1.852
72"	2.847	6.264	9.681	13.097	16.514	19.931
1524. mm	0.206	0.454	0.701	0.949	1.196	1.443
60"	2.220	4.884	7.547	10.211	12.874	15.538
1219.2 mm	0.163	0.359	0.554	0.750	0.946	1.141
48"	1.755	3.861	5.967	8.073	10.179	12.285
914.4 mm	0.120	0.263	0.407	0.550	0.694	0.837
36"	1.288	2.833	4.379	5.924	7.470	9.015
609.6 mm	0.075	0.166	0.256	0.346	0.437	0.527
24"	0.811	1.784	2.757	3.729	4.702	5.675
304.8 mm	0.017	0.038	0.058	0.079	0.099	0.120
12"	0.184	0.405	0.626	.846	1.067	1.288
H/W	304.8 mm	609.6 mm	914.4 mm	1219.2 mm	1524. mm	1828.8 mm
	12"	24"	36"	48"	60"	72"

Performance Chart

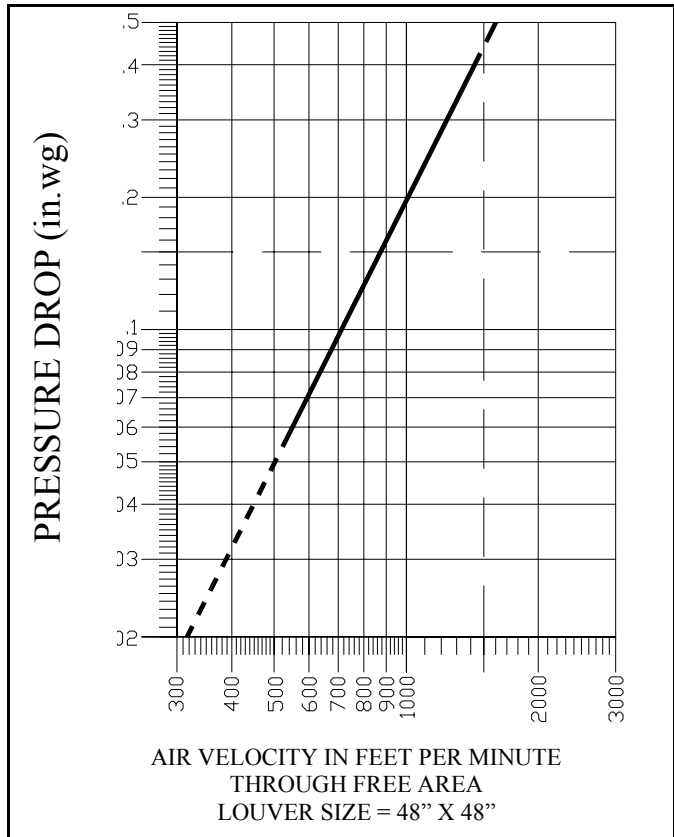

The AMCA Certified Ratings Seal applies to Air Capacities in the intake mode only.

Water Penetration Chart

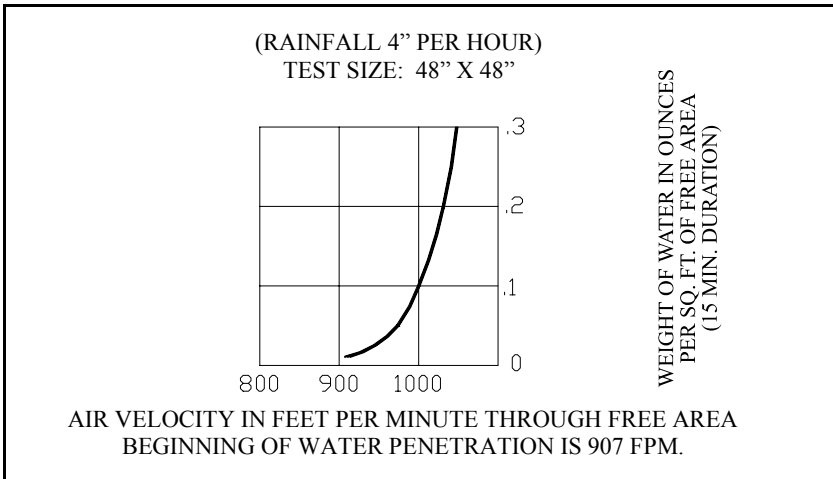

Industrial Louvers, Inc. certifies that Model 655XP shown hereon is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings and water penetration ratings.

Ratings do not include the effect of a bird screen.

NOTE: All tests are for standard .075 lb./cu. ft.

CATALOG NO. 655XP

JANUARY 2004

