

MODEL 1280AAXP

STANDARD CONSTRUCTION



- Material: Formed Aluminum 5005-H34
- Frame: 12" (305mm) deep, .081" (2.1mm) nominal wall thickness
- Blades: 12" (305mm) deep, .081" (2.1mm) nominal wall thickness
- Absorbent Material: 1.5 lb fiberglass
- Blade Spacing: 14.06" (357mm) on center
- Finish: Mill

OPTIONAL ACCESSORIES

- Screen: 1/2" x .063" flattened expanded bird screen and/or 18 x 14 mesh charcoal insect screen.
- Extended Sill Flashing
- Insulated and Non-insulated Blank-off Panels
- Flanged & Glazing Frames of various sizes
- Hinged Access Panels
- Sub-frames
- Visible Mullions

FINISHES

- 2 coat Fluoropolymer: Kynar® 500 / custom colors available in 70% PVDF (AAMA 2605). Living Building Challenge (LBC) Red List Free.
- 3 coat Fluoropolymer: Kynar 500 / Hylar 5000 custom colors available in 70% PVDF (AAMA 2605). LBC Red List Free.
- Anodic finishes: Class I and Class II in Clear, Light/Medium/Dark Bronze, Champagne, and Black.
- Prime coat

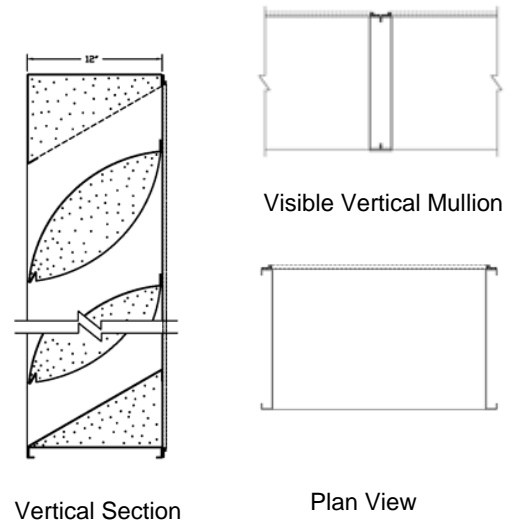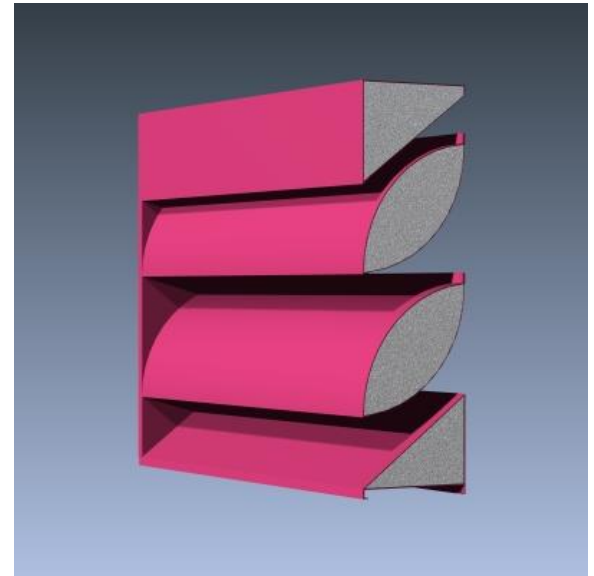

| Qty. | Size: | | Mullion Type | No. of Sections | Notes |
|--------------------------|----------------|--------|-----------------|-----------------|-------|
| | Width | Height | | | |
| | | | | | |
| | | | | | |
| <input type="checkbox"/> | Sill flashing: | | Project: | | |
| <input type="checkbox"/> | Screen: | | Location: | | |
| <input type="checkbox"/> | Finish: | | Architect: | | |
| | Color: | | Representative: | | |
| <input type="checkbox"/> | Other: | | Date: | Job #: | |



MODEL 1280AAXP

SUGGESTED SPECIFICATIONS

General: Furnish and install where indicated on drawings 12" (305mm) Acoustical Louver Model 1280AAXP as manufactured by Industrial Louvers, Inc., Delano, MN.

Material: Formed aluminum frames and blades shall be one piece 5005-H34 alloy. Frame shall have a material thickness of .081" (2.1mm). Fixed blades shall have a material thickness of .081" (2.1mm). The interior face of the blade shall be .032" perforated aluminum sheet. Frames and blades shall be joined by welding, and frame will be caulked to prevent water penetration to interior wall construction.


Performance

- Free area (4' x 4' louver) = 5.91 sq. ft. (36.9%)
- Free area velocity at point of beginning water penetration (.01 oz/sq. ft.) = 615 fpm
- Pressure drop @ 1228.9 FPM velocity = .15" water
- Air volume @ 1228.9 FPM free area velocity = 7,262.80CFM


Free Area

| Square Feet (Square Meters) | | | | | | |
|--|-------------|-------------|--------------|--------------|--------------|--------------|
| Free Area AMCA Licensed for openings up to 72" x 120" | | | | | | |
| For free area data for larger openings, contact factory. | | | | | | |
| 3048.0 | 0.31 | 0.68 | 1.05 | 1.42 | 1.79 | 2.16 |
| 120 | 3.32 | 7.31 | 11.30 | 15.29 | 19.28 | 23.27 |
| 2743.2 | 0.27 | 0.60 | 0.92 | 1.25 | 1.57 | 1.90 |
| 108 | 2.92 | 6.42 | 9.92 | 13.42 | 16.92 | 20.42 |
| 2438.4 | 0.27 | 0.60 | 0.92 | 1.25 | 1.57 | 1.90 |
| 96 | 2.92 | 6.42 | 9.92 | 13.42 | 16.92 | 20.42 |
| 2133.6 | 0.23 | 0.51 | 0.79 | 1.07 | 1.35 | 1.63 |
| 84 | 2.51 | 5.52 | 8.53 | 11.54 | 14.55 | 17.56 |
| 1828.8 | 0.20 | 0.43 | 0.66 | 0.90 | 1.13 | 1.37 |
| 72 | 2.10 | 4.62 | 7.14 | 9.66 | 12.18 | 14.70 |
| 1524 | 0.16 | 0.35 | 0.53 | 0.72 | 0.91 | 1.10 |
| 60 | 1.69 | 3.72 | 5.76 | 7.79 | 9.82 | 11.85 |
| 1219.2 | 0.12 | 0.26 | 0.41 | 0.55 | 0.69 | 0.84 |
| 48 | 1.28 | 2.83 | 4.37 | 5.91 | 7.45 | 8.99 |
| 914.4 | 0.08 | 0.18 | 0.28 | 0.37 | 0.47 | 0.57 |
| 36 | 0.88 | 1.93 | 2.98 | 4.03 | 5.09 | 6.14 |
| 609.6 | 0.04 | 0.10 | 0.15 | 0.20 | 0.25 | 0.30 |
| 24 | 0.47 | 1.03 | 1.59 | 2.16 | 2.72 | 3.28 |
| 304.8 | | | | | | |
| 12 | | | | | | |
| H/W | 304.8 | 609.6 | 914.4 | 1219 | 1524 | 1829 |
| | 12 | 24 | 36 | 48 | 60 | 72 |

Air Performance Chart

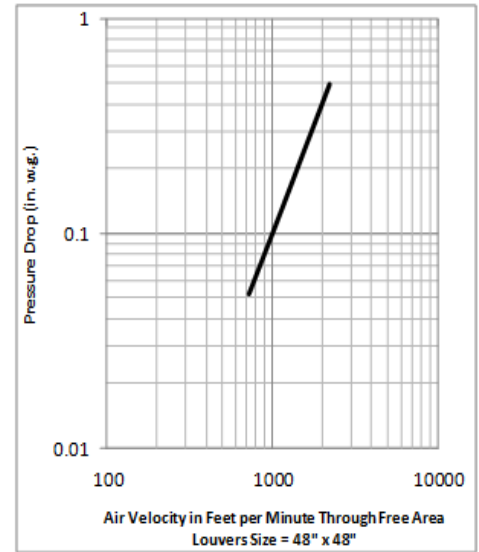

Water Penetration Chart

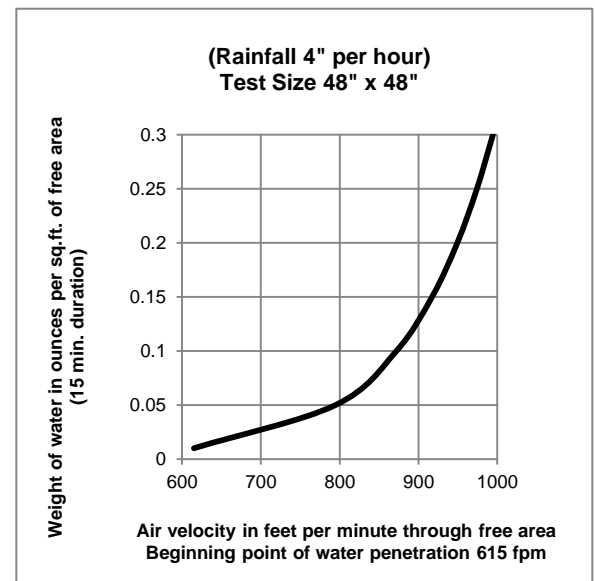

Sound Transmission Chart

| Selected 1/3 Octave Bands Center Frequency HZ | 125 | 250 | 500 | 1000 | 2000 | 4000 | 5000 |
|---|-----|-----|-----|------|------|------|------|
| Transmission Loss In Decibels | 6 | 6 | 8 | 11 | 9 | 8 | 8 |
| Free Field Noise | 12 | 12 | 14 | 17 | 15 | 14 | 14 |

