



MODEL ECG

STANDARD CONSTRUCTION

- **Material:** Extruded Aluminum 6063-T6
- **Frame:** Frame: 2"-12" deep, .125" (3.2mm) nominal wall thickness
- **Blades:** 2"-12" deep, .125" (3.2mm) nominal wall thickness
- **Blade Spacing:** Varies
- **Finish:** Mill

OPTIONAL ACCESSORIES



- Flanged & Glazing Frames of various sizes
- Hinged Access Panels
- Sub-frames

FINISHES

- **2 coat Fluoropolymer:** Kynar® 500 / custom colors available in 70% PVDF (AAMA 2605). Living Building Challenge (LBC) Red List Free.
- **3 coat Fluoropolymer:** Kynar 500 / Hylar 5000 custom colors available in 70% PVDF (AAMA 2605). LBC Red List Free.
- **Anodic finishes:** Class I and Class II in Clear, Light/Medium/Dark Bronze, Champagne, and Black.
- **Prime coat**
- **Mill**

SUGGESTED SPECIFICATIONS

- **General:** Furnish and install where indicated on drawings extruded aluminum Egg Crate Grille (ECG) as manufactured by Industrial Louvers, Inc., Delano, MN.
- **Material:** Extruded aluminum frames and blades shall be .125" extruded aluminum flat bars 6063-T6 alloy. Bars shall be set on an angle and spaced both horizontally and vertically according to the drawings

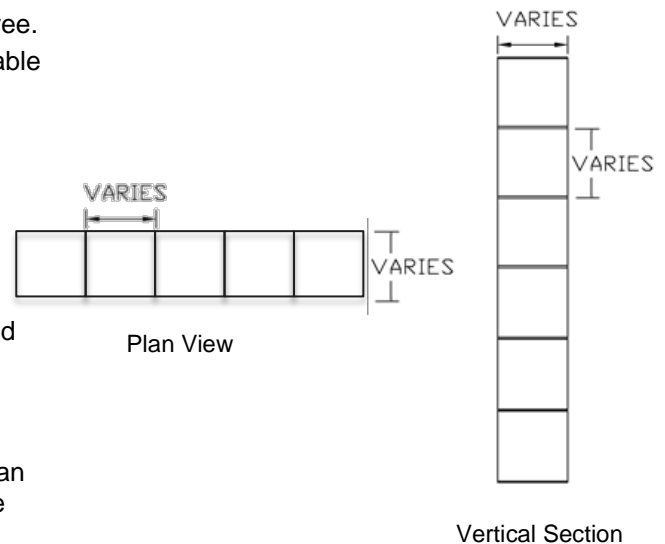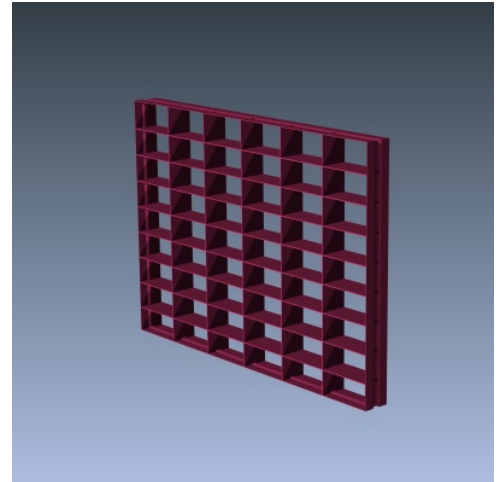

Qty.	Size:		M.O. <input type="checkbox"/>	Mullion Type	No. of Sections	Notes
	Width	Height				
<input type="checkbox"/>	Sill flashing:			Project:		
<input type="checkbox"/>	Screen:			Location:		
<input type="checkbox"/>	Finish:			Architect:		
	Color:			Representative:		
<input type="checkbox"/>	Other:			Date:	Job #:	

CATALOG NO. EGC Rev: FEB 2015

