

# MODEL 626XPI

## STANDARD CONSTRUCTION

- **Material:** Extruded Aluminum 6063-T6 Alloy
- **Vertical Supports:** 2" (51 mm) Deep, 0.125" (3.2 mm) Wall Thickness
- **Blade:** 6" (152 mm) Deep, 0.081" (2.1 mm) Wall Thickness
- **Blade Spacing:** 4" (102 mm) On Center
  - Blade spacing may be adjusted as desired.
- **Blade Angle:** 26°

## OPTIONAL ACCESSORIES


- Cap Flashing
- Visible Mullions
- Invisible Mullions for Continuous Blade Appearance
- Hinged Access Panels

## FINISHES

- **2-Coat Fluoropolymer:** Fluropon Pure® 70% PVDF (AAMA 2605)\*
- **3-Coat Fluoropolymer:** Fluropon Pure® 70% PVDF (AAMA 2605)\*
- **Anodic Finishes:** Class I & Class II, Clear & Bronze Spectrum
- **Prime Coat:** Recommended When Field Painting
  - \*Fluropon Pure® is Living Building Challenge Red List Free
  - \*Custom Colors Available

## SUGGESTED SPECIFICATIONS

- **General:** Furnish and install where indicated on drawings  
6" (152 mm) Extruded Aluminum Equipment Screen Model 626XPI as manufactured by Industrial Louvers, Inc. Delano, MN.
- **Material:** Extruded aluminum vertical supports shall be one piece 6063-T6 alloy. Extruded aluminum blades shall be one piece 6063-T6 alloy. Vertical supports shall have a material thickness of 0.125" (3.2 mm). Fixed blades shall have a material thickness of 0.081" (2.1 mm). Blade braces shall be factory installed onto vertical supports. Vertical supports and blade braces shall be joined by stainless steel fasteners.
- **Performance:** Equipment screen shall provide 69.5% visual screening from a horizontal vantage point. Free area shall be approximately 79.6%.

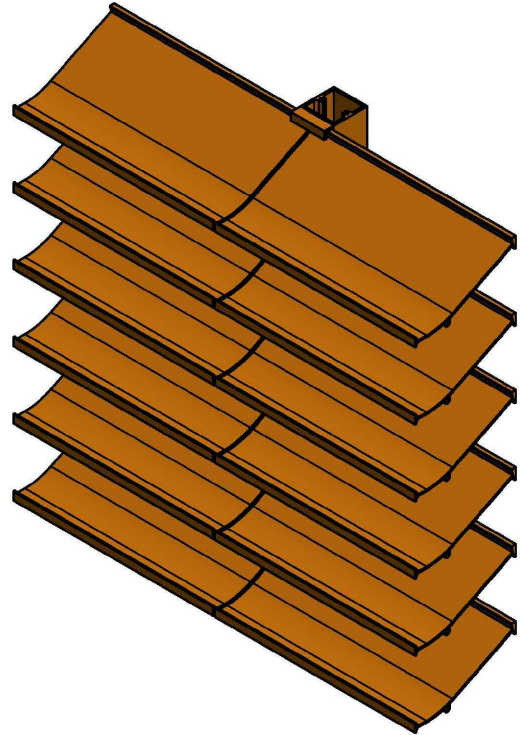

REV: JANUARY 2021

# MODEL 626XPI

## STANDARD CONSTRUCTION

- **Material:** Extruded Aluminum 6063-T6 Alloy
- **Vertical Supports:** 2" (51 mm) Deep, 0.125" (3.2 mm) Wall Thickness
- **Blade:** 6" (152 mm) Deep, 0.081" (2.1 mm) Wall Thickness
- **Blade Spacing:** 4" (102 mm) On Center
  - Blade spacing may be adjusted as desired.
- **Blade Angle:** 26°

## OPTIONAL ACCESSORIES - Mark All Required Options

- Cap Flashing
- Visible Mullions
- Invisible Mullions for Continuous Blade Appearance
- Hinged Access Panels

## FINISHES - Select One

- **2-Coat Fluoropolymer:** Fluropon Pure® 70% PVDF (AAMA 2605)\*
- **3-Coat Fluoropolymer:** Fluropon Pure® 70% PVDF (AAMA 2605)\*
- **Anodic Finishes:** Class I & Class II, Clear & Bronze Spectrum
- **Prime Coat:** Recommended When Field Painting
- **Mill Finish:** Bare Aluminum
  - \*Fluropon Pure® is Living Building Challenge Red List Free
  - \*Custom Colors Available

Mark	Qty	Circle One: Louver Size / Rough Opening		Mullion Type (IVM or VVM)	Num. of Sections	Notes
		Width	Height			

Please complete table above for quotation or immediate release to production. Indicate any required optional accessories and finishes listed above.

