

MODEL 456XP

STANDARD CONSTRUCTION

- **Material:** Extruded Aluminum 6063-T6
- **Frame:** 4" (102 mm) Deep, 0.081" (2.1 mm) Wall Thickness
- **Blade:** 4" (102 mm) Deep, 0.081" (2.1 mm) Wall Thickness
- **Blade Spacing:** 4.25" (108 mm) On Center

OPTIONAL ACCESSORIES


- Bird Screen - 1/2" x 0.063" Flattened Expanded Aluminum
- Insect Screen - 18 x 14 Mesh Charcoal Aluminum
- Sill Flashing
- Insulated & Non-Insulated Blank Off Panels
- Flanged & Glazing Frames
- Visible Mullions
- Invisible Mullions for Continuous Blade Appearance
- Hinged Access Panels

FINISHES

- **2-Coat Fluoropolymer:** Fluoropon Pure® 70% PVDF (AAMA 2605)*
 - **3-Coat Fluoropolymer:** Fluoropon Pure® 70% PVDF (AAMA 2605)*
 - **Anodic Finishes:** Class I & Class II, Clear & Bronze Spectrum
 - **Prime Coat:** Recommended When Field Painting
- *Custom Colors Available

SUGGESTED SPECIFICATIONS

- **General:** Furnish and install where indicated on drawings
4" (102 mm) louver Model 456XP as manufactured by Industrial Louvers, Inc. Delano, MN.
- **Material:** Extruded aluminum frames and blades shall be one piece 6063-T6 alloy. Frame shall have a material thickness of 0.081" (2.1 mm). Fixed blades shall have a material thickness of 0.081" (2.1 mm). Frames and blades shall be joined by stainless steel fasteners, and frame will be caulked to prevent water penetration to interior wall construction.

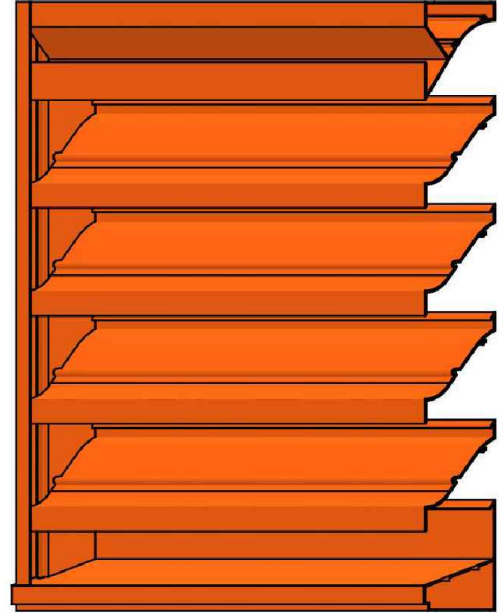

REV: JANUARY 2024



MODEL 456XP

PERFORMANCE


- Free Area = 8.45 ft² (52.8%)
 - Beginning Point of Water Penetration = 903 fpm / 7630 cfm
 - Air Flow @ ΔP of 0.15" Water = 976 fpm / 8247 cfm
- *All Ratings Based on 48" x 48" Test Specimen

FREE AREA (ft²)

Louver Height	120 in	4.91	10.73	16.55	22.36	28.18	34.00
	108 in	4.37	9.55	14.73	19.91	25.09	30.27
	96 in	3.83	8.37	12.91	17.45	21.99	26.53
	84 in	3.29	7.19	11.10	15.00	18.90	22.80
	72 in	2.75	6.02	9.28	12.54	15.80	19.07
	60 in	2.21	4.84	7.46	10.09	12.71	15.33
	48 in	1.85	4.05	6.25	8.45	10.65	12.84
	36 in	1.32	2.87	4.43	5.99	7.55	9.11
	24 in	0.78	1.70	2.62	3.54	4.46	5.38
	12 in	0.24	0.52	0.80	1.08	1.36	1.64

- | | | | | | | |
|--------------|-------|-------|-------|-------|-------|-------|
| Louver Width | 12 in | 24 in | 36 in | 48 in | 60 in | 72 in |
|--------------|-------|-------|-------|-------|-------|-------|
- Effects of blade stiffeners or additional bracing has not been considered.
 - Effects of screen or other accessories has not been considered.
 - Contact Industrial Louvers for free area of other sizes.
 - 1 in = 25.4 mm
 - 10.76 ft² = 1 m²

AIR PERFORMANCE

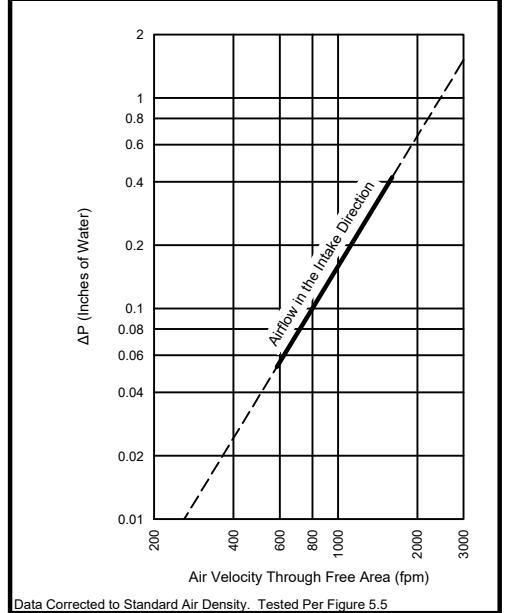

Data Corrected to Standard Air Density. Tested Per Figure 5.5



Industrial Louvers, Inc. certifies that the Model 456XP shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings and water penetration ratings.

© 2024 Industrial Louvers. All rights reserved.

REV: JANUARY 2024



www.IndustrialLouvers.com
 ilinfo@IndustrialLouvers.com

511 South 7th Street, Delano MN 55328
 Tel: 763.972.2981 | Fax: 763.972.2911