

EXTRUDED FIN

STANDARD DESIGN ELEMENTS

- Extruded Aluminum Fin Blade
- Shaped Outriggers
- Mounting Brackets
- Various Fin Angles

OPTIONS


- Extruded Blades in Various Sizes
- Bird Mouth Style Mounting Brackets
- Custom Mounting Brackets to Suit Anchorage Requirements

FINISHES

- 2-Coat Fluoropolymer: Fluoropon Pure® 70% PVDF (AAMA 2605)*
 - 3-Coat Fluoropolymer: Fluoropon Pure® 70% PVDF (AAMA 2605)*
 - Anodic Finishes: Class I & Class II, Clear & Bronze Spectrum
 - Prime Coat: Recommended When Field Painting
- *Custom Colors Available

SUGGESTED SPECIFICATIONS

- General: Furnish and install where indicated on drawings
Extruded Aluminum Fin as manufactured by Industrial Louvers, Inc. Delano, MN.
- Material: Fin blade shall be one piece extruded aluminum, or self-mating multi-piece extruded aluminum. Outriggers shall be minimum 1/4" (6.4 mm) thick and machined to match shape of fin blade. Outriggers and fin blades shall be joined by stainless steel fasteners. Mounting brackets shall be 3/8" (9.5 mm) thick extruded tee shape.

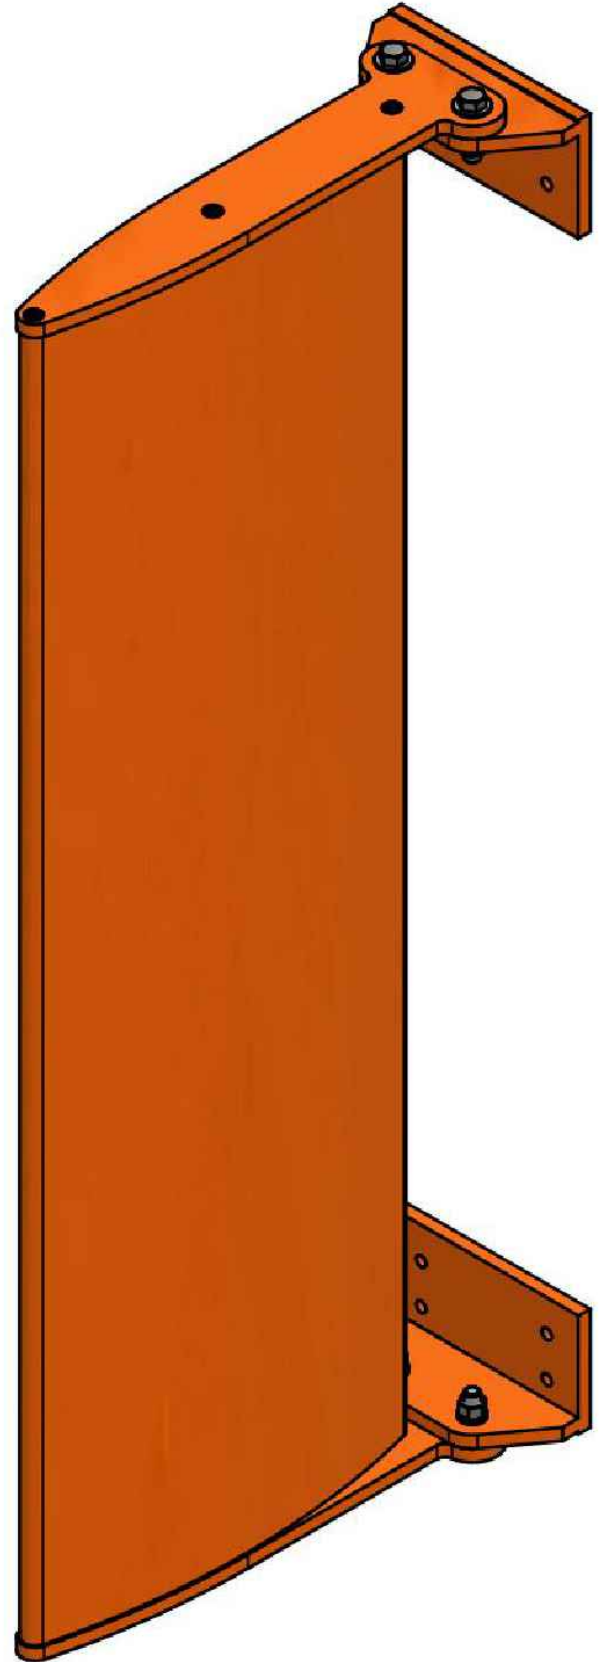

REV: SEPTEMBER 2023